C20161001 LIST OF MATERIAL FOR ROOFTOP BRIDGE				
ITEM	QTY.	PART NO.	DESCRIPTION	WEIGHT
1.	1	CS00688	PLATE, ROOFTOP BRIDGE COVER	55#
2.	3	C20165002	SQUARE TUBE, ROOFTOP BRIDGE SLEEPER (PVC)	6#
3.	1	CK00041	HARDWARE KIT (SEE BELOW FOR LIST)	5#
			TOTAL WEIGHT	66#

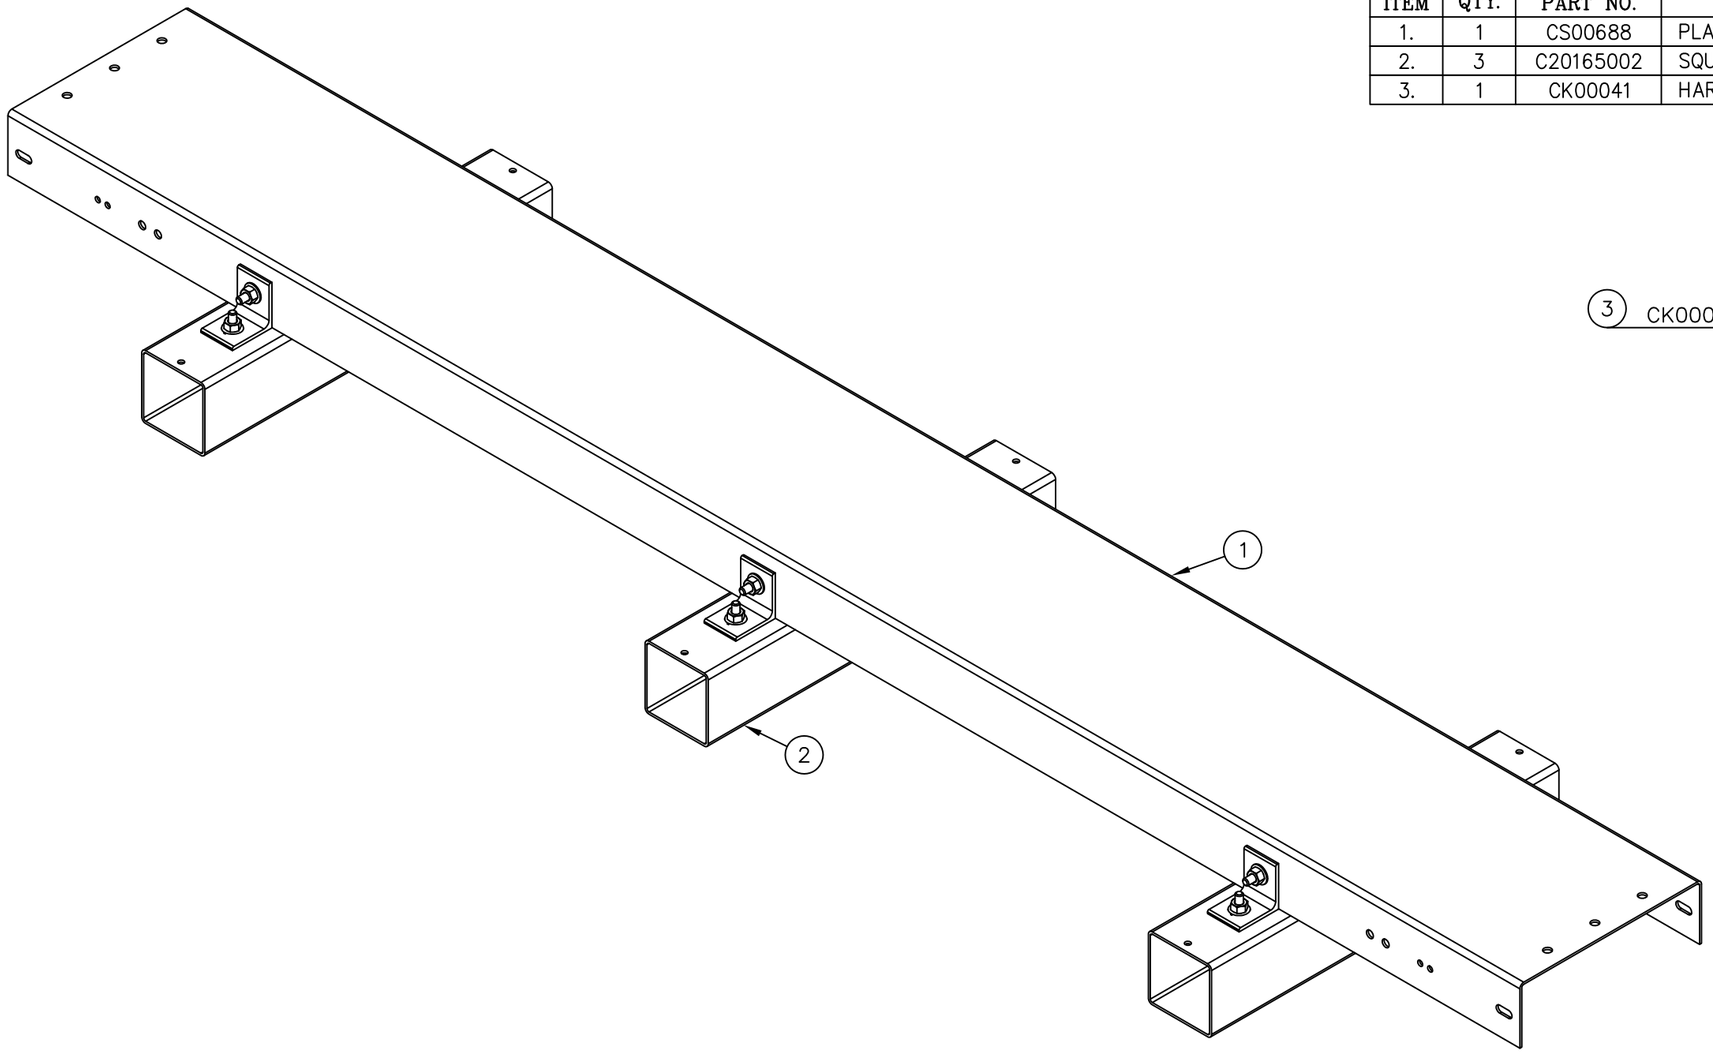

ISOMETRIC VIEW

(3) CK00041 HARDWARE KIT INCLUDES:
(12) 3/8"–16 X 1 1/4" BOLT ASSEMBLY GR.5
(12) 3/8" FLATWASHER
(12) 3/8"–16 NYLON RETAINING NUT
(6) CLIP ANGLE (sabre738)

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS INCLUDE
FINISHES AND ARE IN INCHES

TOLERANCES: FRACTIONS ± 1/16"
ANGLES ± 1/2 DEG.
DECIMALS ± .010"

MATERIAL:

TOLERANCES DO NOT APPLY TO RAW MATERIAL

REV	DATE	DRW	CHK	DESCRIPTION
1	6/23/10	KLE	EK	ITEM 1 REVISED MATERIAL GAGE (WAS 11 GA.)

Sabre™ Towers & Poles

CONFIDENTIAL
This document and the information contained herein is the confidential trade secret property of Sabre Communications Corporation ("Sabre") and must not be reproduced, copied or used, in whole or in part, for any purpose without the prior written consent of Sabre.
© 2008 Sabre Communications Corporation. All rights reserved.

4 COAX ROOFTOP BRIDGE (11 1/2" WIDE X 8' LONG)

DATE	1/14/08
DRAWN BY	JV/MLC
CHECKED BY	MC

SIZE	DRAWING NO.	REV
B	C20161001	1

SCALE	PAGE
None	1 OF 1